ECOBULK

OUTLET VALVES DN 80 INTEGRATED

Including polypropylene gasket.



The new outlet valve applies the successful concept of the integrated DN 50 outlet valve to the DN 80 diameter:

- Welded instead of screwed connection to the inner bottle
- More safety due to the elimination of the flange gasket
- The outlet valve is twist-proof and has a high dimensional stability


In case of technical concerns or questions: tcs@schuetz.net



www.schuetz.net

Increased construction safety

Through the permanent connection of the inner bottle to the outlet valve the gasket is omitted

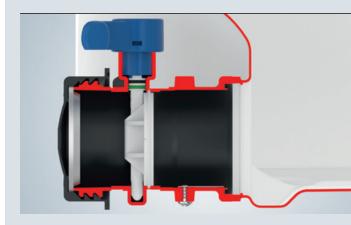

Earthed version

Earthed to the last drop through the ideal position of the earthing plate



New PP gasket for the butterfly valve

The material is characterised by its high chemical stability and good mechanical properties

Opening and closing of the butterfly valve has also been improved by the use of the new material

